

SAP srl

www.pompesap.com

Motor-driven
pump



ES

CHARACTERISTICS AND PERFORMANCE

- Motor-driven pump designed to be fully immersed in liquid
- Scaled pole type electric motor
- Winding insulation CLF and resin coated
- Degree of protection: IP. x 8
- Thermal overload cut-out incorporated
- AISI 420 stainless steel tempered shaft
- Motor running on self-lubricating (long-life) bearings in semi-rigid supports: Almost total absorption of vibrations and noise.
- Double lip seal treated with special anti-friction lubricant
- Water outlet adjustable by 360°
- Anti-block filter on suction
- Power cable length: 2 metres
- Part of the pump made of thermoplastic material, resistant to high temperatures

NOTES AND VARIOUS WARNINGS

- It is strictly forbidden to use flammable liquids
- Before you connect the electric pump, always check the voltage and frequency on the ratings plate
- Connect the earth cable to the electrical safety systems before connecting to the mains
- The pump won't be damaged by partially or totally closing the inlet pipe
- We can supply motors with input voltages and frequencies that meet the specific requirements of the customer.

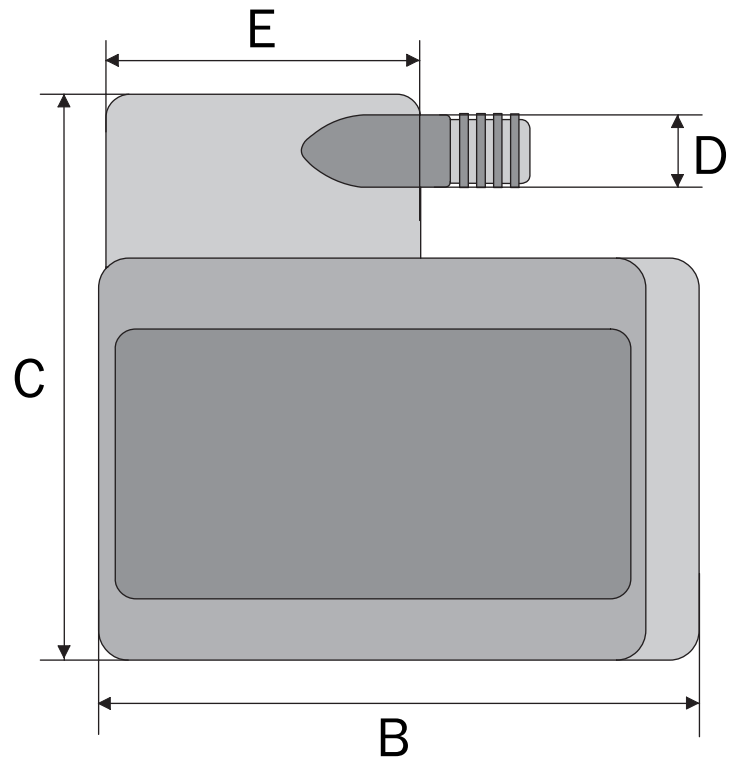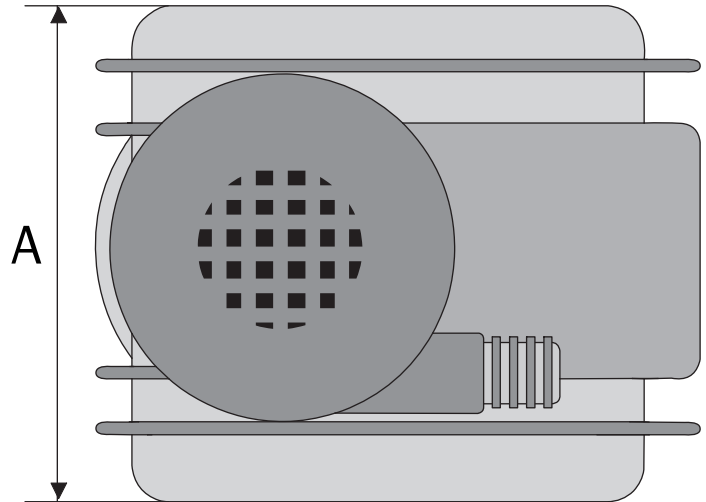

TYPE	VOLT/HZ	A	B	C	D	E
ES - 1	24/50	68	83	86	11,5	47
	48/50					
ES - P	110/50	68	88	86	11,5	59
	220/50					
	380/50					

